

INSTALLATION INSTRUCTIONS

Failure to follow these instructions can severely shorten the life of this part and may void the part's warranty.


Installation Process

1. Disconnect the NEGATIVE battery cable
2. Remove old Starter Solenoid
3. Mount new Starter Solenoid
4. Connect POSITIVE battery cable to terminal "B"
5. Connect Starter Motor cable to terminal "M"
6. Connect Ignition Switch lead to terminal "S"
7. If applicable, connect Coil lead to terminal "I"

If old Starter Solenoid had only 3 terminals-

"B", "M", "S" - do not use terminal "I"

8. Reconnect the NEGATIVE battery cable

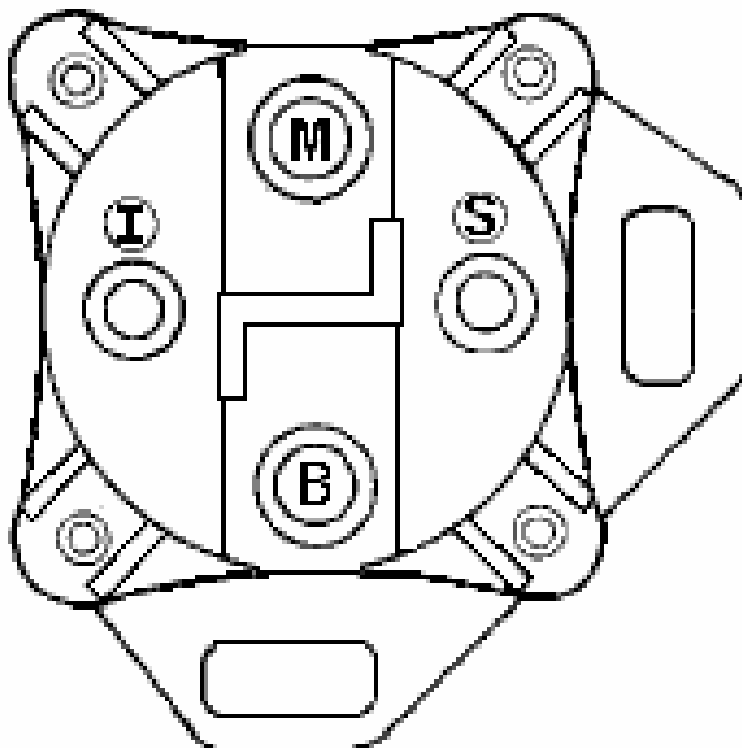

Models Covered:
SS4